



OFDR

Outdoor fiber drop repair closure

The gel sealed drop repair closure is used as a repair splice for fiber only or hybrid drop cables

The gel, used for both, closure and cable seals, allows easy access and is fully re-useable.


Features

- Single ended or in-line design
- Compact enclosure
 - In-line: 415(L) X 76(W) X 71(H) mm
 - Butt: 297(L) X 76(W) X 71(H) mm
- Cable seal with gel plug
- Organizer can be removed from closure body
- Compatible with RECORDsplice, SMOUV and ANT splice protectors
- Round cable 3-9 mm diameter
- Fiber bend radius of 20 mm
- Closure with overcentering "ski boot" type of latches
- Integrated mounting brackets
- The closure can be used as well in aerial, pedestal and underground (up to 2 meters) environment.

Kit content

- Closure cap-ended or in-line
- Cable clamps
- Cleaning tissue
- Gel tape
- Fiber splice tray
- Cable plug(s) for three cables
- Installation Instruction
- Universal splice holder for 8 splices
- Splice holder for 12 SMOUV 45 mm splice protectors
- Splice holder for 12 ANT splice protectors

Ordering information

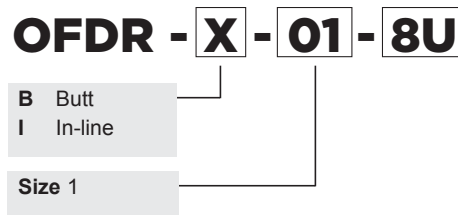

For more technical options and order quantity information, please consult the products ordering guides or your local sales representative.

SMOUV, RECORDsplice, TE (logo) and TE Connectivity are trademarks of the TE Connectivity group of companies and its licensors.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Tyco Electronics Raychem bvba
Diestsesteenweg 692
3010 Kessel-Lo, Belgium
Tel 32-16 351 011 (USA)1-919-557-8900
Fax 32-16 351 697 (USA)1-919-557-8498
www.te.com
www.telecomnetworks.com
TC 1049/DS/4 09/11

