

Disconnection Magazine**TELECOM OUTSIDE PLANT**

The UCS (Universal Connection System) family of products provides a reliable, quick and easy to use system for wire management.

The UCS Disconnection Magazine utilises an insulation displacement contact (IDC). This provides fast and reliable wire termination while eliminating time-consuming wire stripping and wrapping or soldering.


The design of the IDC terminals allows it to terminate a variety of wire sizes and insulation types. It will accept 0.40 mm to 0.64 mm (26 to 22 AWG) solid wire.

The contact will terminate hard PE wire insulations as well as the more common PVC insulation. It's made of silver plated brass alloy.

The UCS-DM is a 8-pair magazine designed for applications in which there is or will be a need for protecting, testing or breaking the circuits. This includes distribution frames and on customer premises, as well as in outside plant installations.


The plastic magazine surrounds each IDC terminal, making installation and tracing of wires simpler. All the terminals are recessed within the housing, providing an electrically "dead front" which virtually eliminates short circuits on the front face. Its design provides built-in break access capability which can be used for testing in both directions, for monitoring circuit performance or for circuit disconnection.

A wide range of protection options is available, as is a broad selection of accessories, such as test/patch-cords, magazine label holder, hinged label holder, circuit marker and line-opening plugs.

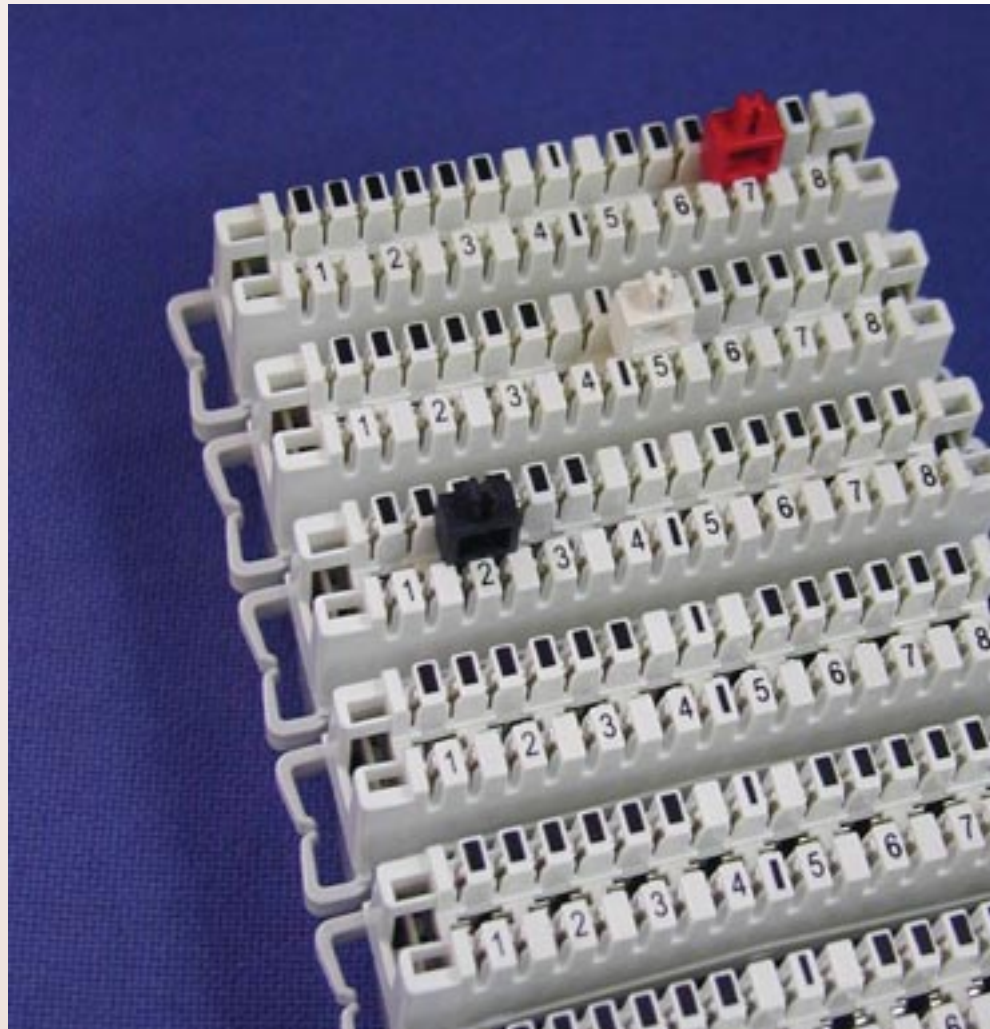

UCS-DM-8

UCS-DM-8

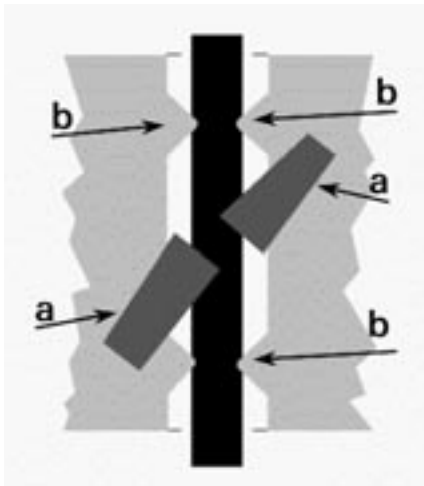

The Contact Advantages

The combination of both contact design (a) and slot ribs (b) lead to a significant improvement in the mechanical characteristics (stress and vibration resistance) of the connection by (a) guaranteeing a tighter fixation point and isolation of the wire. (b) Wire contact at 45° angles which increases the distance between opposite contact points, makes the installation easier and minimizes axial and torsional residual stresses.




Disconnection terminal



Overvoltage magazine



Test cords

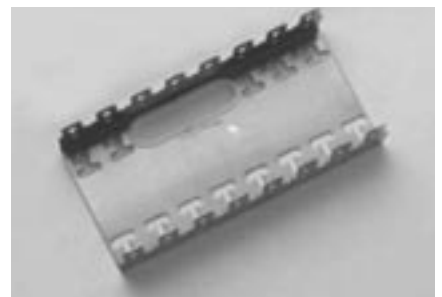

Mounting frame



Installation tool



Hinged label holder

Tyco is a trademark of Tyco International

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, Tyco Electronics makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Tyco Electronics' obligations shall only be as set forth in Tyco Electronics' Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Tyco Electronics products should make their own evaluation to determine the suitability of each such product for the specific application.

Mondragon Telecommunications S.L.

Polígono industrial Mediterráneo
C/. La Fila, parcela 1
46550 Albuixech-Valencia, España
Tel.: 34-96-141 70 72
Fax: 34-96-141 74 15

Tyco Electronics Raychem NV

Telecom Outside Plant
Diestsesteenweg 692
3010 Kessel-Lo, Belgium
Tel.: 32-16 351 011
Fax: 32-16 351 697
www.tycoelectronics.com

Tyco Electronics Corporation

Telecom Outside Plant
8000 Purfoy Road
Fuquay Varina - NC 27526-9349
Tel.: 1-919-557-8900
Fax: 1-919-557-8598