

Splice Closure for the Unpressurised Telephone Network**TELECOM OUTSIDE PLANT**

- Prevents water ingress by use of non-flowing gel under permanent compression
- Three sizes are available accommodating joints up to 30 pairs
- Quick, easy to use
- No special tools required to install
- Robust and reliable under a wide variety of environmental conditions
- Many connector types can be accommodated
- Butt, in-line, and branch configurations are possible
- Easy, clean re-entry




G E L S N A P

GELSNAP

Sizing/ordering information

Dimensions in mm

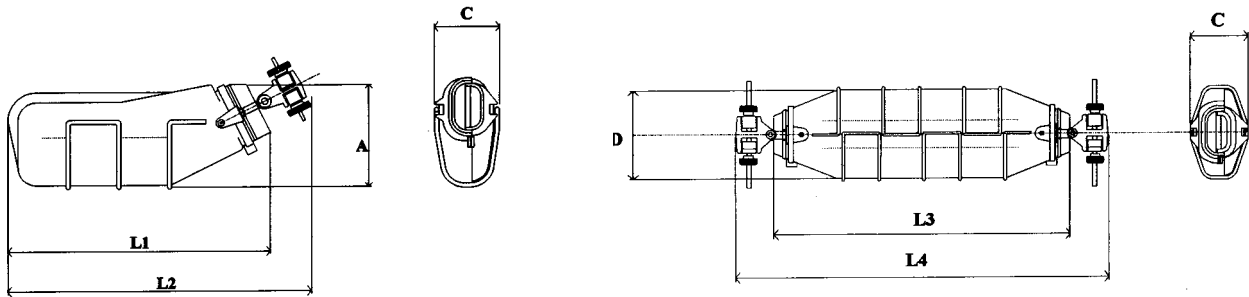

Raychem description	Max. cable Ø	Min. cable Ø	Max. splice opening	Max. splice capacity	Splice type	Branching
Gelsnap-A-10/5-80	10	5	80	3 pairs	Butt	Max. 2 cables
Gelsnap-B-14/5-130	14	5	130	10 pairs	Butt In-line	Max. 2 cables at each end
Gelsnap-C-18/5-180	18	5	180	30 pairs	Butt In-line	Max. 2 cables at each end

Closure dimensions

Dimensions in mm

Raychem description	L1	L2	L3	L4	A	C	D
Gelsnap-A-10/5-80	130	155	-	-	64	33	-
Gelsnap-B-14/5-130	-	-	225	290	-	33	80
Gelsnap-C-18/5-180	-	-	270	335	-	33	80

Kit content

The Gelsnap closure kit contains

- Two gel filled half shells
- Gel compression springs
- Tie wraps to confine the gel at each end of the closure
- Strain relief accessories
- Installation instruction

Tyco Electronics Raychem NV Telecom Outside Plant

Diestsesteenweg 692
3010 Kessel-Lo, Belgium
Tel.: 32-16 351 011
Fax: 32-16 351 697
www.tycoelectronics.com

Tyco, Raychem and GELSNAP are trademarks of Tyco International.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, Tyco Electronics makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Tyco Electronics' obligations shall only be as set forth in Tyco Electronics' Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Tyco Electronics products should make their own evaluation to determine the suitability of each such product for the specific application.

TC 256/DS/5 05/97