

Cold Applied Re-usable Closure System

TELECOM OUTSIDE PLANT

- Watertight in-line splice closure sealing aerial, underground and direct buried splices in unpressurised copper networks
- Versatile gel closure bringing new levels of installation convenience and application flexibility
- Easy re-entry and re-closure
- Cable configuration changes possible with a minimum of extra accessories
- Few sizes covering a wide application range up to 300 pairs
- Multiple branching possible up to six cables
- No special installation tools required
- Innovative cut-to-fix axial pull tapes providing mechanical cable retention
- Integrated mounting brackets for aerial installations
- Robust construction with high mechanical strength
- No restriction on shelf life



T
2
C

T2C

Kit content

- Central part : top and bottom delivered as one part
- Gel profiles : 4 pcs
- O-ring seal : 2 pcs
- 4-out cable separator: 1 pc (large sizes only)
- Plugs for unused cable ports
- Axial pull tapes + tie wraps
- Gel sealing tape
- Cleaning tissue
- Bolts and washers
- Measuring tape
- Installation instruction





Re-entry kit

A re-entry kit can be ordered separately to add or replace cables.

Reference: e.g. T2C-68-RE.

The re-entry kit includes gel sealing tapes, axial pull tapes, measuring tape and tie wraps.

Installation steps

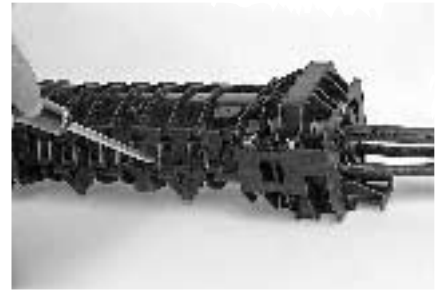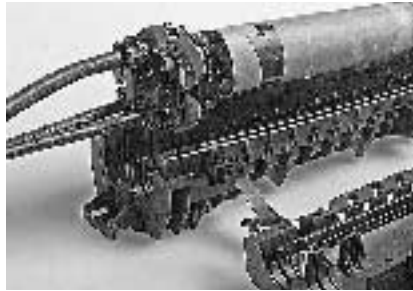

Sizing/ordering information

Dimensions in mm

Description	Max.splice diam.	Max. sheath opening	Cable configurations	Cables IN max.diam.	Cables OUT max.diam.	Typical splice capacity
T2C 48-225-2/2	48	225	2 in - 2 out	2 x 15	2 x 15	30p/50p
T2C 68-400-2/4	68	400	2 in - 4 out	2 x 26	4 x 26	100p/200p
T2C 100-450-2/4	100	450	2 in - 4 out	2 x 40	4 x 40	300 p

Tyco Electronics Raychem NV Telecom Outside Plant

Diestsesteenweg 692
3010 Kessel-Lo, Belgium
Tel.: 32-16 351 011
Fax: 32-16 351 697
www.tycoelectronics.com

Tyco is a trademark of Tyco International.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, Tyco Electronics makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. Tyco Electronics' obligations shall only be as set forth in Tyco Electronics' Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of Tyco Electronics products should make their own evaluation to determine the suitability of each such product for the specific application.

TC 519/DS/2 09/00