




XCSM

High performance thick wall heat-shrinkable tubing

- High recovery ratio reducing the number of sizes and inventory costs
- UV stabilised material suitable for aerial and underground applications
- Used where maximum reliability is required, submersible, direct buried installations
- Internally coated with hotmelt adhesive or mastic both giving high corrosion and mechanical performance
- Available in 5 standard lengths

Sizing/ordering information

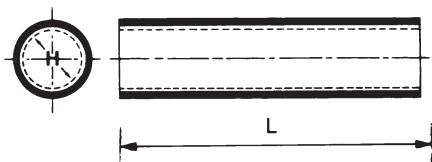

Description	H a (mm)	H b (mm)
XCSM 23/6	23	6
XCSM 30/8	30	8
XCSM 44/12	44	12
XCSM 55/18	55	18
XCSM 85/22	85	22


H a: as supplied

H b: after unrestricted recovery

Standard lengths: 250, 500, 750, 1000, 1500

Ordering example

XCSM-85/22-1500/S(Sxx)

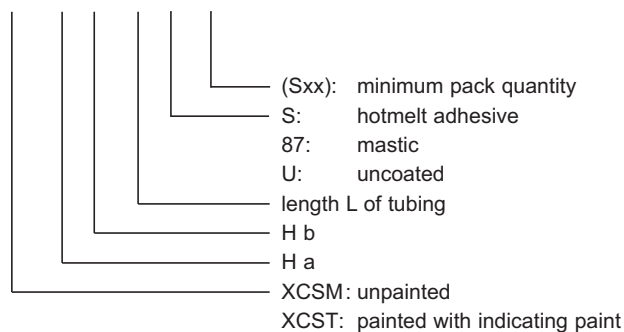

TE (logo) and TE Connectivity are trademarks of the TE Connectivity group of companies and its licensors.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Tyco Electronics Raychem bvba

Diestsesteenweg 692

3010 Kessel-Lo, Belgium

Tel 32-16 351 011 (USA)1-919-557-8900

Fax 32-16 351 697 (USA)1-919-557-8498

www.te.com

www.telecomnetworks.com

TC 049/DS/9 03/12

