

TracerLight®

Connector Identification System



ADC KRONE's innovative TracerLight® Connector Identification System offers a quick and accurate method of identifying the termination point of optical patch cords. Each end of a TracerLight® patch cord features a flashing light source allowing technicians to visually trace individual patch cords from one end to the other without pulling or affecting the patch cord.

The TracerLight® power source is inserted into the TracerLight® component on one end of the patch cord. This causes the LED on each end to begin flashing rapidly. As a result, the distant end of the patch cord can be quickly and easily identified without interruption of service.

The compact power source is composed of a lightweight, plastic flashlight body featuring two AA batteries and a printed circuit board (PCB). It provides approximately 80 hours of continuous service and features 1-hour auto-off. The end of battery life is indicated by a slowing of the blink rate.

Features:

- Dramatically minimizes the risk of taking the wrong fibre out of service
- Improves system turn-up speed and accuracy
- TracerLight® patch cords meet all optical performance criteria of standard ADC KRONE patch cords
- Ideally suited for Central Offices, Data Centers and cross-connect patching
- 72% reduction in jumper turn-up times and 13% reduction in accidental down-time. TracerLight® pays for itself again and again
- Available in any standard length or connector style
- Same functions, features and stringent environmental standards as ADC KRONE's standard patch cords
- Installed in the same manner as ADC KRONE's standard patch cords
- Easily pulled through ADC KRONE's FiberGuide® fibre cable management system

TECHNICAL DATA



Technical Assistance
Europe & Middle East • +32 2 712 6542 • euro.tac@adckrone.com
United Kingdom • 0800 960236 • contactuk@adckrone.com
www.adckrone.com

Specifications

OPTICAL PERFORMANCE

Singlemode Ultra Polish Connectors (UPC)	SC	FC	LC
Insertion Loss (1310 and 1550 nm)	0.2 dB max. 0.09 dB typical	0.2 dB max. 0.09 dB typical	0.3 dB max. 0.1 dB typical
Return Loss (1310 and 1550 nm)	57 dB min.	57 dB min.	55 dB min.
Fibre Recess	± 50 nm	± 50 nm	-100 to +50 nm
Apex Offset	50 µm max.	50 µm max.	50 µm max.
Radius of Curvature	10-25 mm	10-25 mm	10-25 mm


Singlemode Angled Polish Connectors (APC)	SC		LC
Insertion Loss (1310 and 1550 nm)	0.35 dB max. 0.15 dB typical		0.35 dB max. 0.15 dB typical
Return Loss (1310 and 1550 nm)	65 dB min.		65 dB
Polished Endface Radius	5 - 15 mm		5 - 12 mm
Fibre Recess	-100 to +50 nm		±50 nm
Apex Offset	50 µm		±50 µm
Endface Angle	8° ± 0.5		8°

Multimode Ultra Polish Connectors	SC		LC
Insertion Loss (1310 nm)	0.3 dB max.		0.3 dB max.
Return Loss (1310 nm)	20 dB min.		20 dB max.


MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

Every patch cord manufactured by ADC KRONE is designed to pass rigorous qualification testing that includes: EIA/TIA Industry Standards according to Fibre Optic Test Procedures (FOTP).

Item Specifications	EIA/TIA Test	Item Specifications	EIA/TIA Test
Temperature shock	FOTP-3	Cable flex	FOTP-1A
Humidity	FOTP-5	Cable retention	FOTP-6
Temperature life	FOTP-4	Cable twist	FOTP-36
Mating durability	FOTP-21	Impact	FOTP-2
Vibration	FOTP-11		



TracerLight® Simplex Assembly

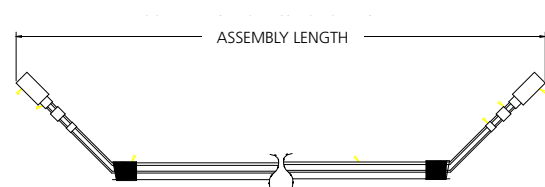

TracerLight® Duplex Assembly

Singlemode or Multimode Patch Cords (Simplex and Duplex)

SIMPLEX

Connector Style (first end)

Singlemode	
7	SC ultra polish
E	SC angled polish
2	FC ultra polish
C	LC ultra polish
M	LC angled polish
Multimode	
9	SC
P	LC

Connector Style (second end)

Singlemode	
7	SC ultra polish
E	SC angled polish
2	FC ultra polish
C	LC ultra polish
M	LC angled polish
Multimode	
9	SC
P	LC

Catalog Number

FTL- / - M

Assembly Length

001-020	1-20 meters in 1 meter increments
025-065	25-65 meters in 5 meter increments
070-150	70-150 meters in 10 meter increments

Cable Type (1.7 mm)

Singlemode	
D	Standard singlemode (yellow)
P	Reduced bend radius singlemode (blue)
Multimode	
A	50/125 µm multimode (orange)
J	50/125 µm laser optimized to 300 m multimode (aqua)
G	62.5/125 µm multimode (orange)

Ordering Examples

FTL-7/7-D003M: Singlemode simplex patch cord with SC connectors on both ends, 3 meters in length.

FTL-9/9-A005M: Multimode simplex patch cord with SC connectors on both ends using 50/125 µm fibre, 5 meters in length.

DUPLEX

Connector Style (first end)

Singlemode	
7	SC ultra polish
E	SC angled polish
2	FC ultra polish
C	LC ultra polish
M	LC angled polish
Multimode	
9	SC
P	LC

Connector Style (second end)

Singlemode	
7	SC ultra polish
E	SC angled polish
2	FC ultra polish
C	LC ultra polish
M	LC angled polish
Multimode	
9	SC
P	LC

Catalog Number

FTL- / - M

Assembly Length

001-020	1-20 meters in 1 meter increments
025-065	25-65 meters in 5 meter increments
070-150	70-150 meters in 10 meter increments

Cable Type (1.7 mm)

Singlemode	
Z	Dual zip singlemode (yellow)
R	Reduced bend radius dual zip singlemode (blue)
Multimode	
E	50/125 µm dual zip multimode (orange)
K	50/125 µm laser optimized to 300 m multimode (aqua)
H	62.5/125 µm dual zip multimode (orange)

Ordering Examples

FTL-7CZ010M: Singlemode dual zip patch cord with SC to LC connectors, 10 meters in length.

FTL-PPE010M: Multimode dual zip patch cord with LC connectors on both ends using 50/125 µm fibre, 10 meters in length.

Other connector styles are available upon request. Please contact ADC KRONE Technical Assistance Center.

Tracerlight®

06/07 • 104282BE



TracerLight® Power Source
FTL-PS

Ordering Information

Description	Catalog Number
TracerLight® Power Source	FTL-PS
TracerLight® Plus Launch Cable (for use with a tone generator)	FTL-TGLC

TECHNICAL DATA



Web Site: www.adckrone.com

EMEA Office: ADC GmbH, Beeskowdamm, 3-11, 14167 Berlin, Germany • Phone: +49 30 8453-1818 Fax: +49 30 8453-1703. For a listing of all ADC KRONE's global sales office locations, please refer to our web site.

UK Office: ADC Communications (UK) Ltd., Runnings Road, Kingsditch Trading Estate, Cheltenham, Gloucestershire GL51 9NQ, United Kingdom • Phone: +44 (0) 1242 264 400 Fax: +44 (0) 1242 264 488 contactuk@adckrone.com

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC KRONE reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting ADC GmbH headquarters in Berlin. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents.

Part Number 104282BE Jun 07 Original © 2007 ADC Telecommunications Inc. All Rights Reserved