



# LSA-PLUS® Series 2 Connection and Disconnection Modules

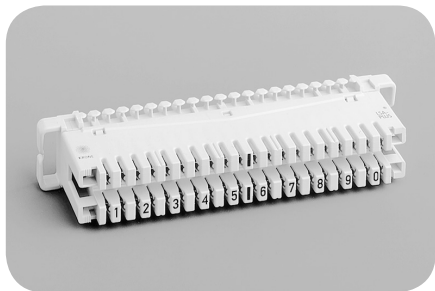


A technically and commercially superior quick connection system for all state-of-the-art networks. Contacts that ensure the highest degree of reliability even under the most adverse environmental and climatic conditions. A completely reliable, gas-tight connection between the contact and conductor. That's LSA-PLUS® technology.

The LSA-PLUS System family consists of a comprehensive and diverse range of high density, standard and special modules, mounting hardware, test and patch cords, accessories and protection devices.

Voice, high-speed data transmission via ISDN, ADSL, VDSL, cable TV, Internet access, mobile networks – working in conjunction with TE Connectivity you will be able to confidently face the issues created by vast amounts of network traffic. In addition, TE quality ensures total end-customer satisfaction. TE copper connectivity solutions are designed to deliver fast, safe and reliable transmission.

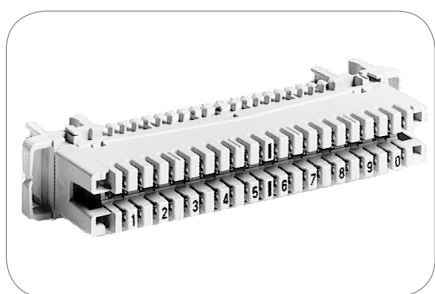

Series 2 Connection Module

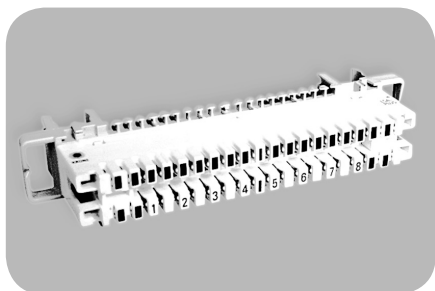

Series 2 Disconnection Module

## FEATURES AND BENEFITS

- Connection modules available in eight- and ten-pair configurations with parallel test access or overvoltage protection contact
- Eight- and ten-pair modules with disconnection points for opening the line, testing in both directions or insertion of graded protection elements
- Based on genuine LSA-PLUS® connection technology
- LSA-PLUS modules mount on back mount frames
- LSA PROFIL modules mount on profile rods (8-pair modules: 75 or 95mm spacing between rods; 10-pair modules: 95mm spacing between rods) or on back mount frames
- Suitable for use in all xDSL and ADSL2+ circuits
- Robust long-term environmental stability allows both indoor and outdoor installation
- Supports all LSA-PLUS Series 2 accessories
  - Overvoltage protection
  - Labels
  - Test and connection cords

# LSA-PLUS® Series 2 Connection and Disconnection Modules

## SPECIFICATIONS

### ELECTRICAL VALUES

Insulation resistance:	>50 GΩ @ 500 V
Contact resistance:	1 mΩ

### SAFETY CLASSIFICATION (EN 60950)

Transient voltage:	2.5k V
Operation voltage for basic insulation:	210VDC TNV
Pollution severity:	II
Current-carrying capacity:	2 A
Impulse current:	5 kA (8/2μs)

### CONDUCTOR DIAMETER/OUTER DIAMETER OF CONNECTABLE WIRES

Single solid wire per contact:	0.35mm/0.68mm to 0.9mm/1.5mm AWG 26 to AWG 20
Stranded wires (7 tin-coated copper strands):	0.12mm to 0.32mm/up to 2.1mm (depending on insulation type) AWG 28 to AWG 20
Overall diameter of connectable wires (solid insulation)	0.68mm to 1.6mm

### PROPERTIES

Connection frequency:	200 times
Plug-in cycles:	250

### TEMPERATURE

Storage (EN 60721-3-1):	1K5 (-40° C to +90° C)/1Z1/1B1/1C1/1S1/1M2
Transport (EN 60721-3-2):	2K2 (-40° C to +90° C)/2B1/2C1/2S1/2M2
Operation (EN 60721-3-3):	3K5 (-5° C to +60° C)/3Z1/3B1/3C1/3S1/3M2
Relative humidity:	95%; no water condensation, no ice

### MATERIALS

Plastics:	PBT; resistant against aggressive chemicals (PVC-softener)
Plastics flammability class:	UL94V-0
Halogen free according to:	RoHS, European Directive 2002/96/EG
Contact:	Special brass, silver-plated

## DATA SHEET



#### Contact us:

Tyco Electronics Raychem bvba  
Diestsesteenweg 692  
3010 Kessel-Lo  
Belgium  
Tel +32 16 351 011  
Fax +32 16 351 697

[www.te.com](http://www.te.com)  
[www.te.com/adckrone](http://www.te.com/adckrone)

LSA-PLUS, TE Connectivity and TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies.

While TE Connectivity has made every reasonable effort to ensure the accuracy of the information in this document, TE Connectivity does not guarantee that it is error-free, nor does TE Connectivity make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE Connectivity reserves the right to make any adjustments to the information contained herein at any time without notice. TE Connectivity expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this document are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE Connectivity for the latest dimensions and design specifications.