



C5X-MF

Mounting frames

The C5C wire management system features an exclusive mounting frame. This is designed expressly for the C5C magazine to ensure smooth, reliable installation. The magazines are mounted onto the frame by flexing the jumper guides upwards and sliding the magazine into position where the harpoon locks will engage with the magazine slots.

Magazine removal is tool-less, simply reverse the above operation.

The stainless steel mounting frames are available in standard lengths identified by the number of mounting positions: 10, 20, 30 or 40.



Other features include

- elongated "T"-shaped mounting holes which offer flexible mounting capability (standard version only)
- chamfered edges to minimize the risk of injury and damage.



Two mounting frame designs are available with variants for MDF and cabinet applications.

Dimensions

Values in mm

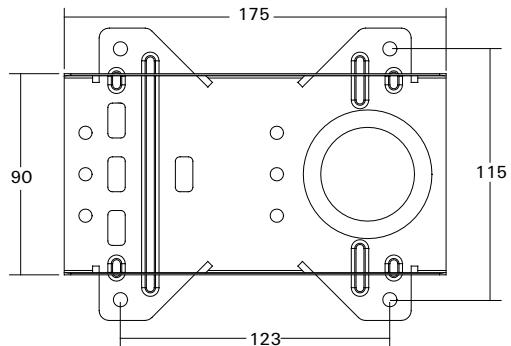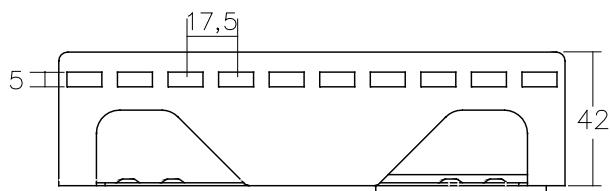

Mounting frame for cabinet applications

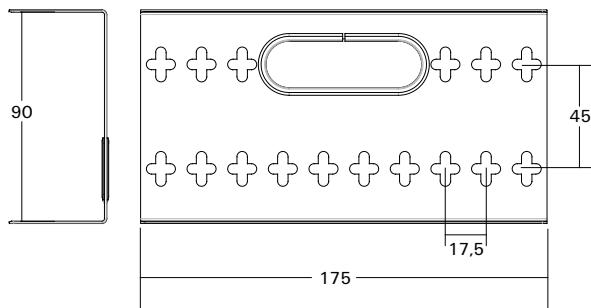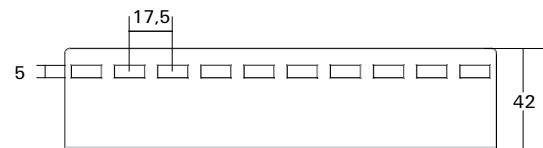

**Universal mounting frame
MDF & cabinet applications**

Ordering information

Positions	Storage space (mm)	Length (mm)	Product name	TCPN
Universal mounting frames MDF & cabinet applications				
10	42	175	C5X-MF-42-10	C24450-000
20	42	350	C5X-MF-42-20	E46686-000
30	42	525	C5X-MF-42-30	E01660-000
40	42	700	C5X-MF-42-40	A64979-000
Mounting frames for cabinets applications				
10	42	175	C5X-MF-42-10-CAB	C25666-000

C5X, TE (logo) and TE Connectivity are trademarks of the TE Connectivity group of companies and its licensors.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Tyco Electronics Raychem bvba
Diestsesteenweg 692
3010 Kessel-Lo, Belgium
Tel 32-16 351 011 (USA)1-919-557-8900
Fax 32-16 351 697 (USA)1-919-557-8498
www.te.com
www.telecomnetworks.com
TC 638/DS/3 01/10

