

Cross Connection Cabinet 92

Cross Connection Cabinet 92

The CCC 92 is designed for the accommodation of cable heads. The insert frame can hold 4 x 100 pairs (cable head 80) or 6 x 100 pairs (cable head 80K-NT). For universal applications a mounting plate is available.

- ❑ The weather-proof enclosure made of fibre-reinforced polycarbonate is available with or without ventilation, depending on the application.
- ❑ Mounting frame made of stainless steel.
- ❑ The door is designed as a slot-in unit.
- ❑ The cabinet Series 92 comes ready for installation, i.e. with the plinth already attached.
- ❑ Pre-stressed break off joints reduce repair costs and downtime after an accident because the underground base usually remains intact. Damaged elements can be easily replaced.

Dimensions:

W x H x D in mm: 425 x 846 x 300 (without plinth)

Technical specifications:


Dimensions:	refer to dimension drawing
Application range:	air temperature: -30 to +60°C rel. humidity 5% - 95%
Protection:	Cabinet 92A: IP 54 acc. to IEC 529 Cabinet 92B: IP 44 acc. to IEC 529
Cabinet material:	fibre-reinforced polycarbonate, painted
Flammability class:	UL 94V-0
Colour:	grey (similar to RAL 7038)
Metal parts:	mounting rack: stainless steel other parts: sheet-steel, galvanised and yellow-chromated
Recycling:	polyester can be fully recycled

General ordering information:

Cabinet AR: A = without ventilation, R = jumper frame
Cabinet AM: A = without ventilation, M = mounting plate
Cabinet BM: B = with ventilation, M = mounting plate



Cabinet 92AR with cable head rack, door version with half profile cylinder

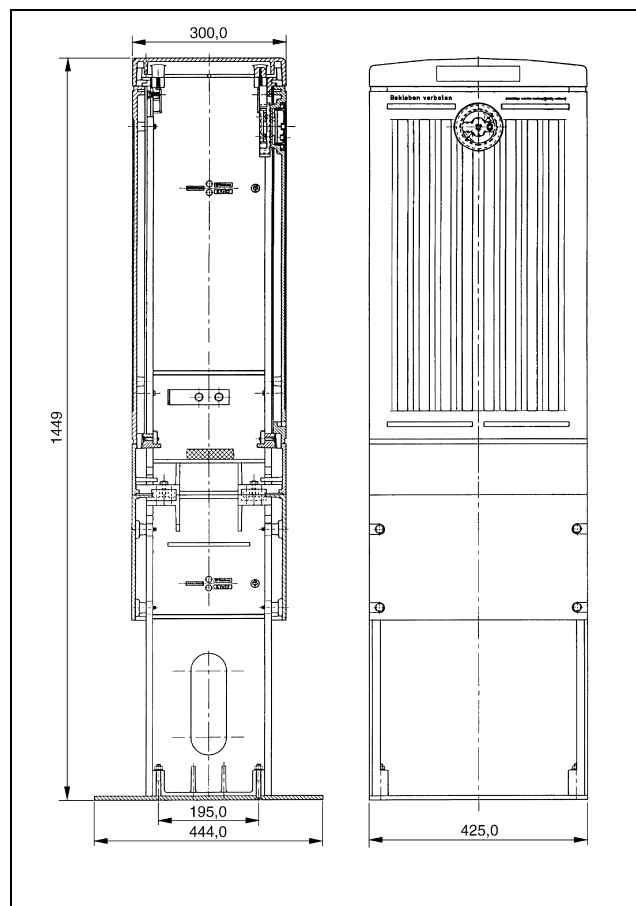

Cross Connection Cabinet 92

Order data:	Order-No:	Bezeichnung	Gewicht/VE	VE
	6992 1 501-40	Cabinet 92AR without ventilation with jumper frame for 400 pairs (cable head 80) or 600 pairs (cable head-80K-NT) with mounted plinth door prepared for installation of a profile lock according to DIN 18252 ¹⁾ by the customer	20.000kg	1 piece
	6992 1 504-40	Cabinet 92AM without ventilation with plastic mounting plate 600 x 370 x 8 mm with mounted plinth door prepared for installation of a profile cylinder lock, design 7	20.400kg	1 piece
	6992 1 524-42	Cabinet 92BM with ventilation with plastic mounting plate 600 x 370 x 8 mm with mounted plinth door with profile cylinder lock, design 7, including one key; code STW	20.400kg	1 piece

Special accessories:	Bestellnummer	Bezeichnung
	7056 2 360-00	Half profile cylinder with KRONE lock system 19 with one key